

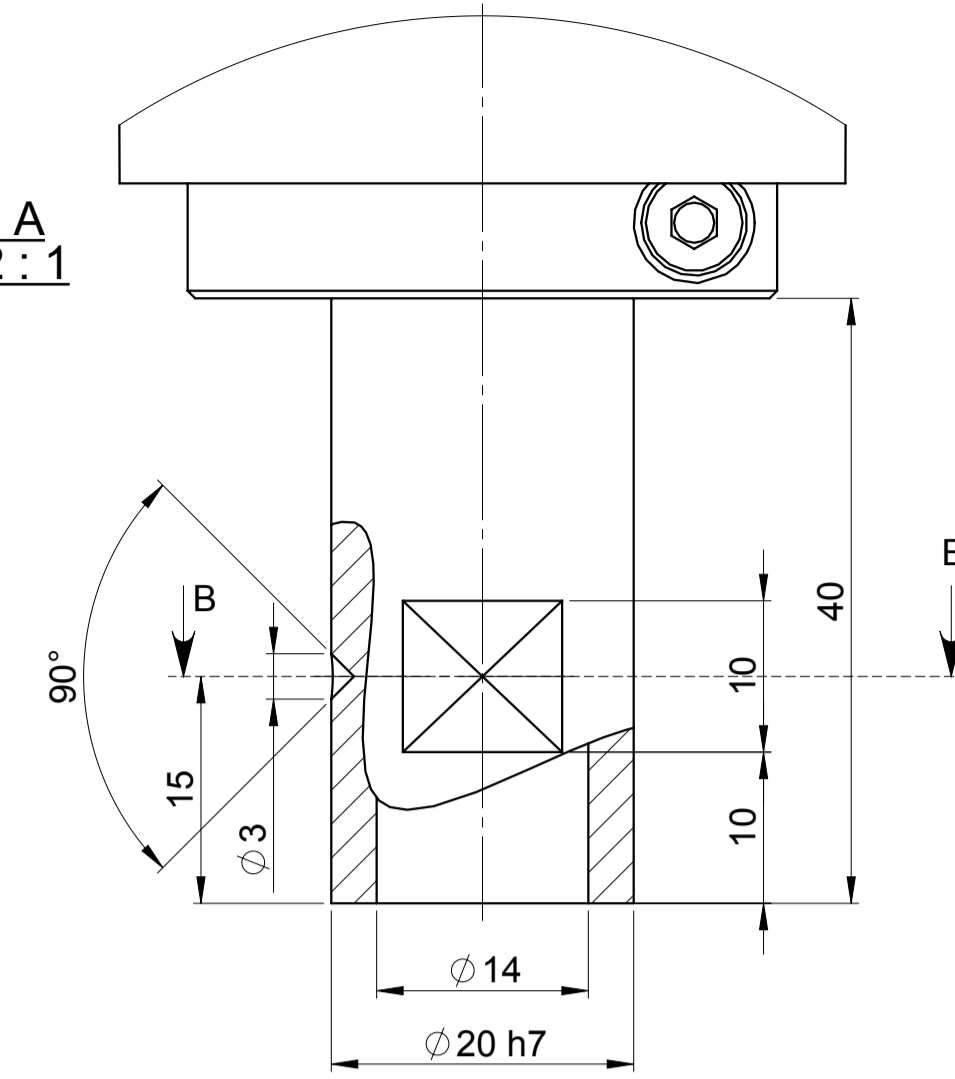


DETAIL A  
SCALE 2:1

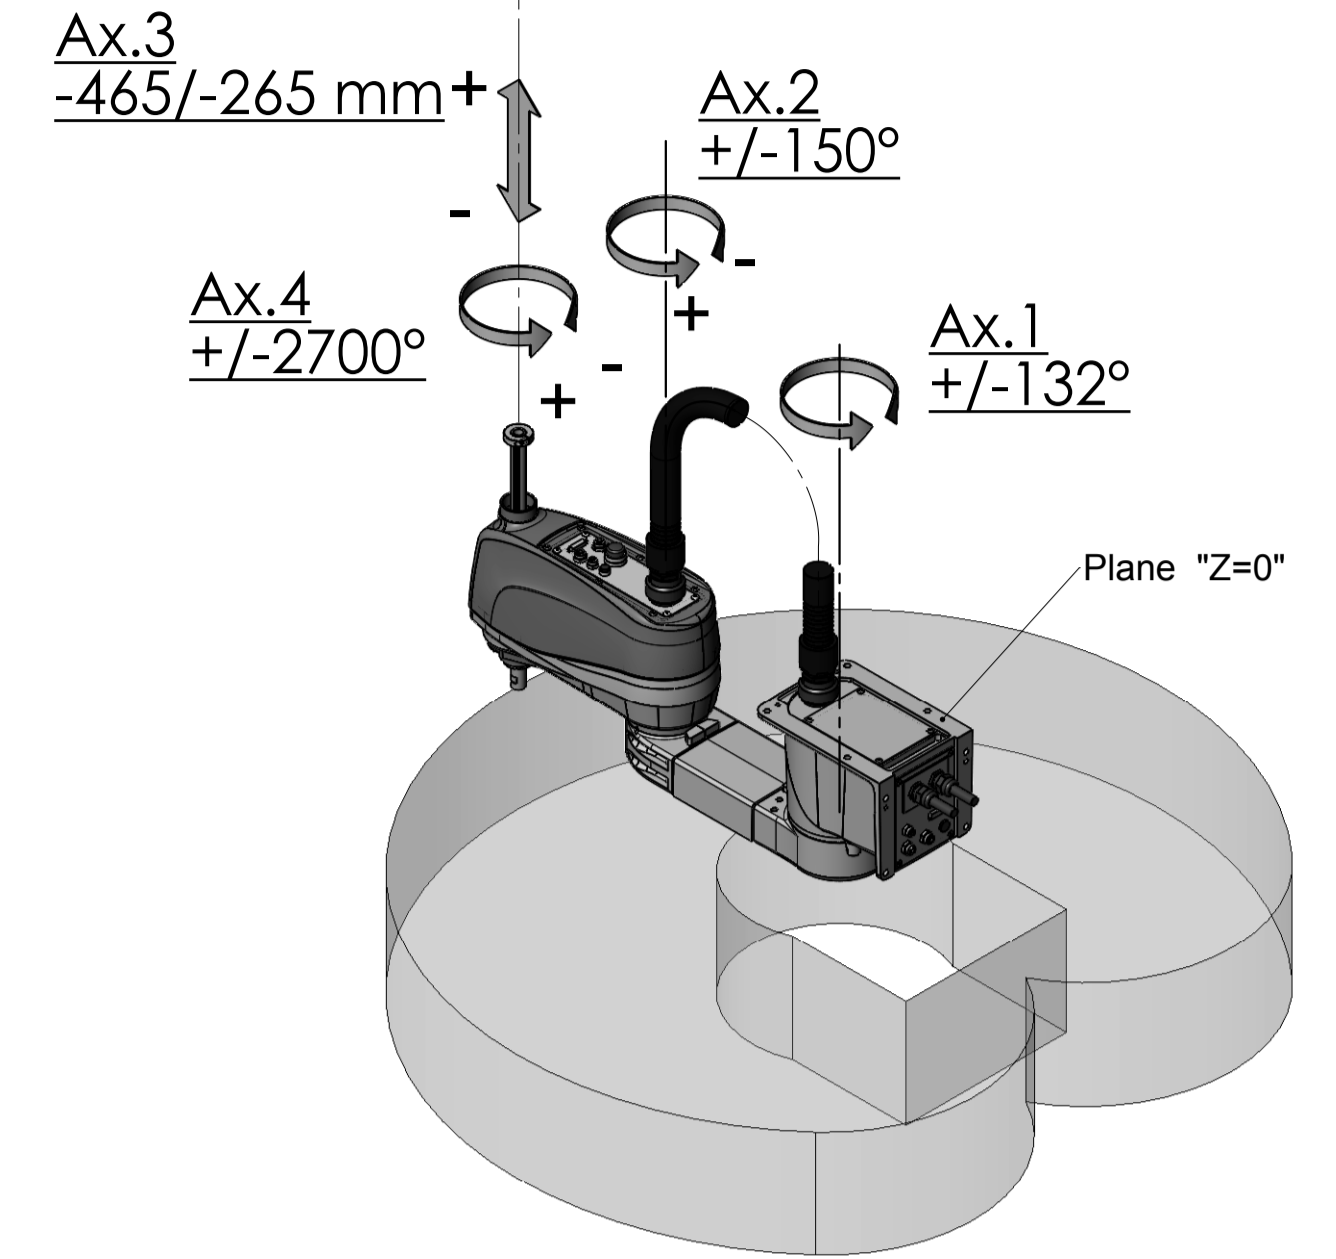


B-B  
SCALE 2:1

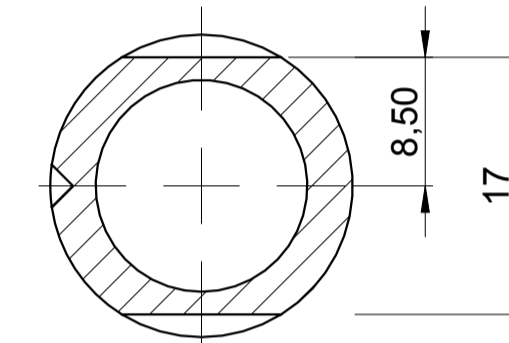


CALIBRATION POSITION				
X (mm)	Y (mm)	Z (mm)	Ax.1	Ax.2
+600,000	0,000	-295,000	0°	0°


WORKING AREA MAIN POINTS					
Pos.	X (mm)	Y (mm)	Z (mm)	Ax.1	Ax.2
0	+600,000	0,000	0,000	0°	0°
1	-401,478	-445,887	0,000	-132°	0°
2	-348,967	0,000	0,000	-132°	-109,433°
3	-275,000	-150,000	0,000	-100,385°	-117,712°
4	-62,833	-150,000	0,000	-55,004°	-150°
5	-62,833	+150,000	0,000	+55,004°	+150°
6	-275,000	+150,000	0,000	+100,385°	+117,712°
7	-348,967	0,000	0,000	+132°	+109,433°
8	-401,478	+445,887	0,000	+132°	0°

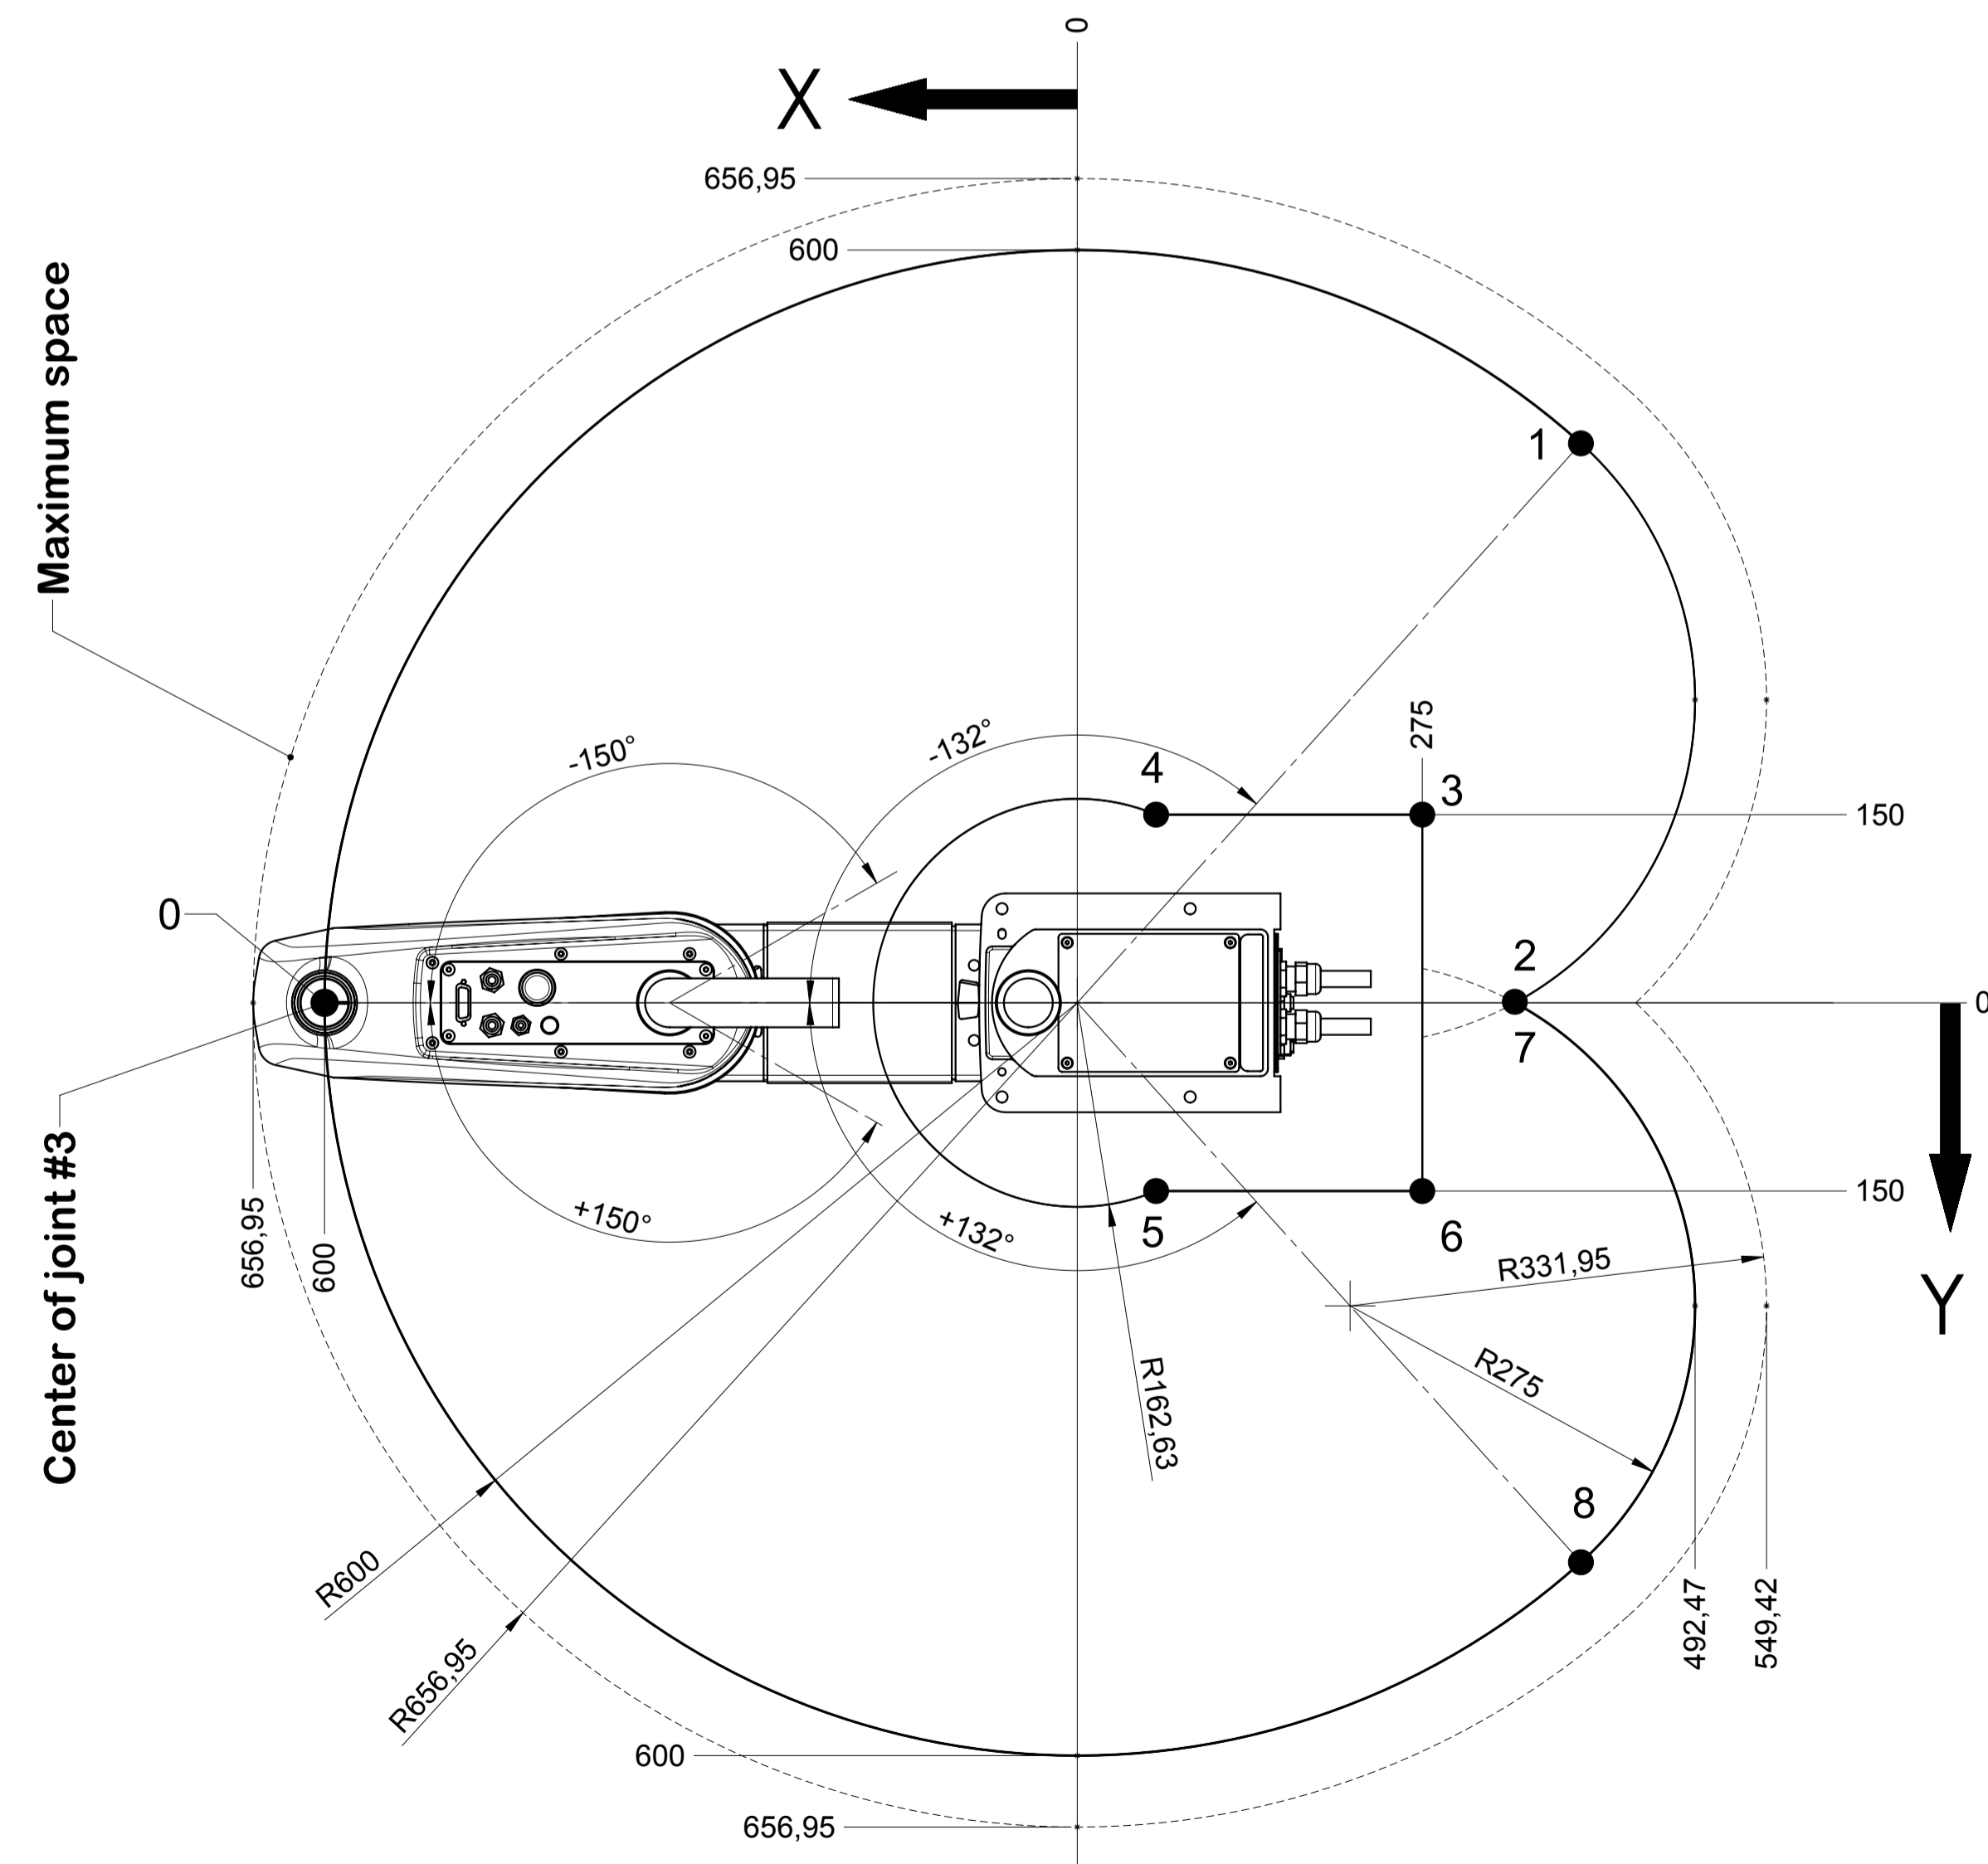

VIEW "C"  
SCALE 1:2

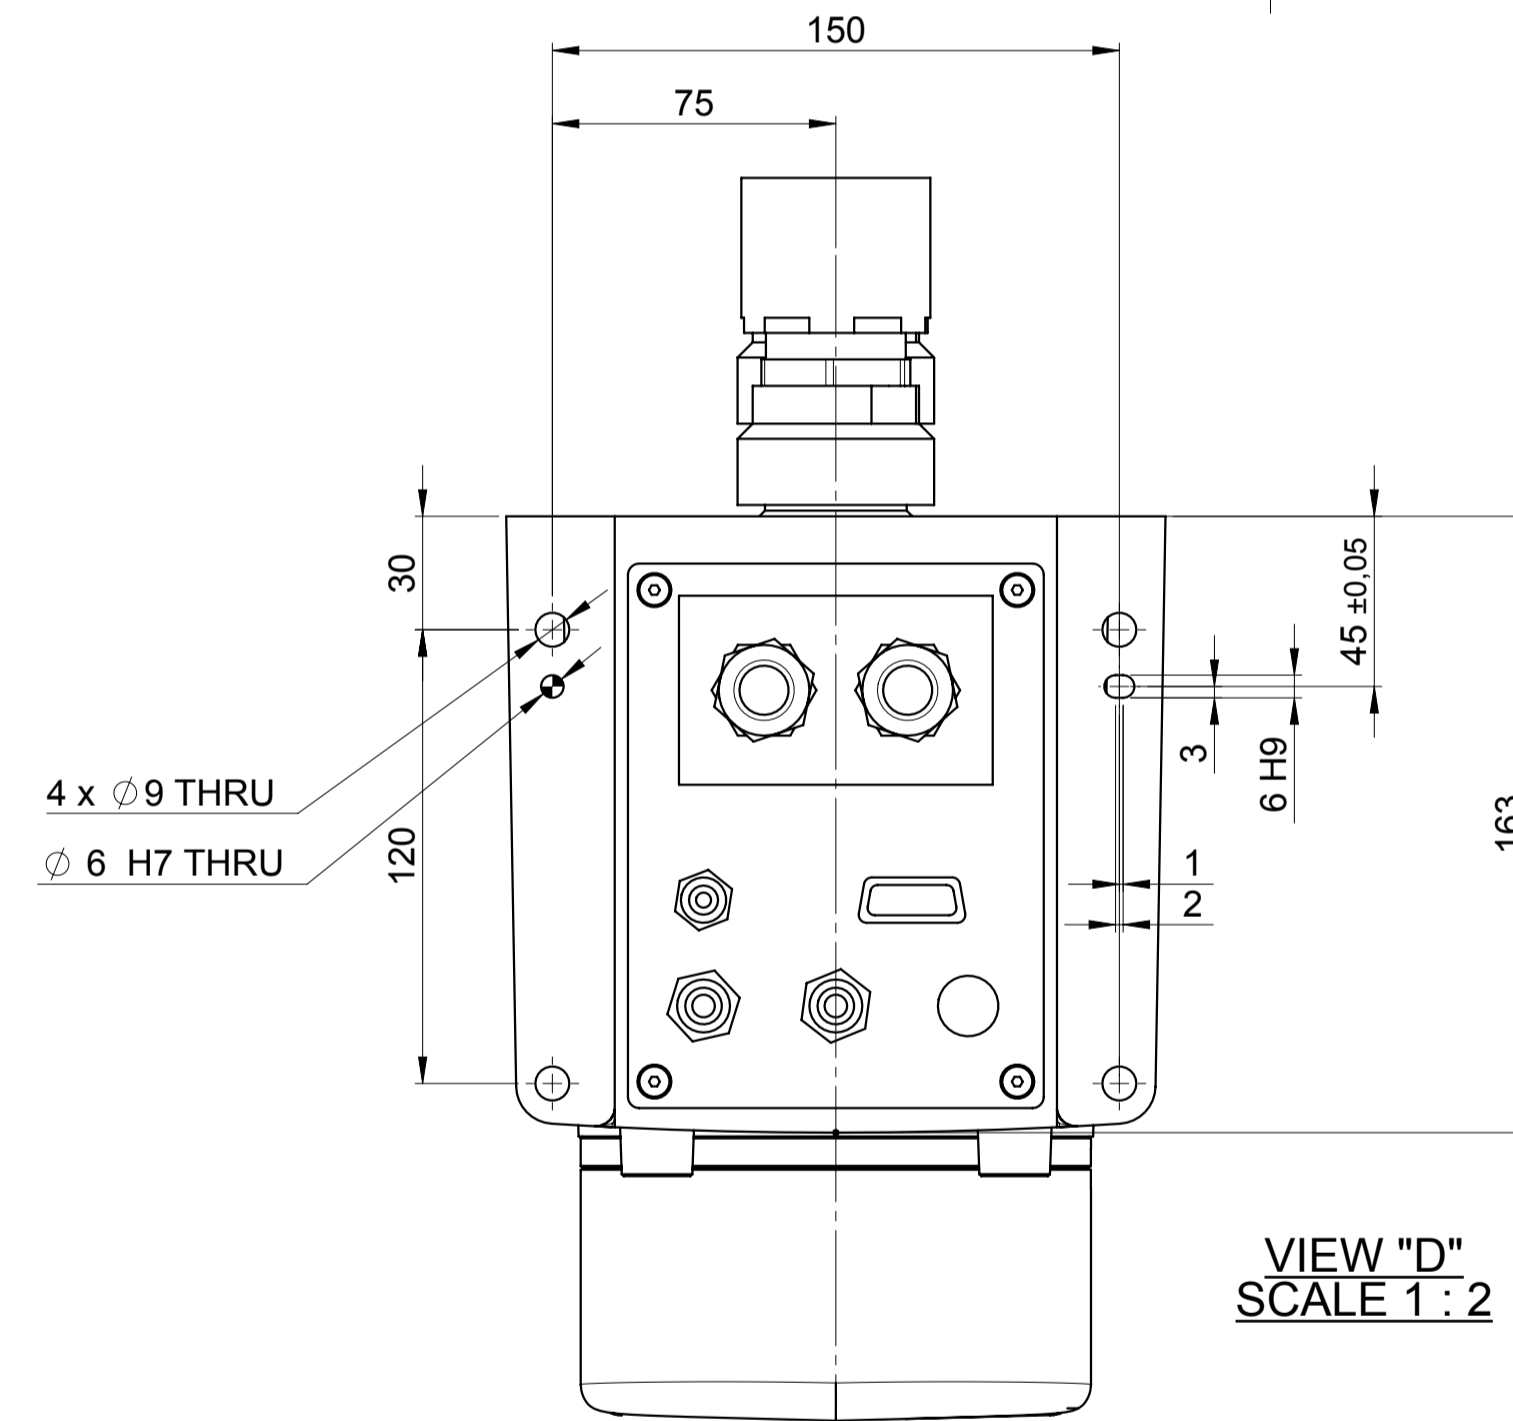

VIEW "D"  
SCALE 1:2

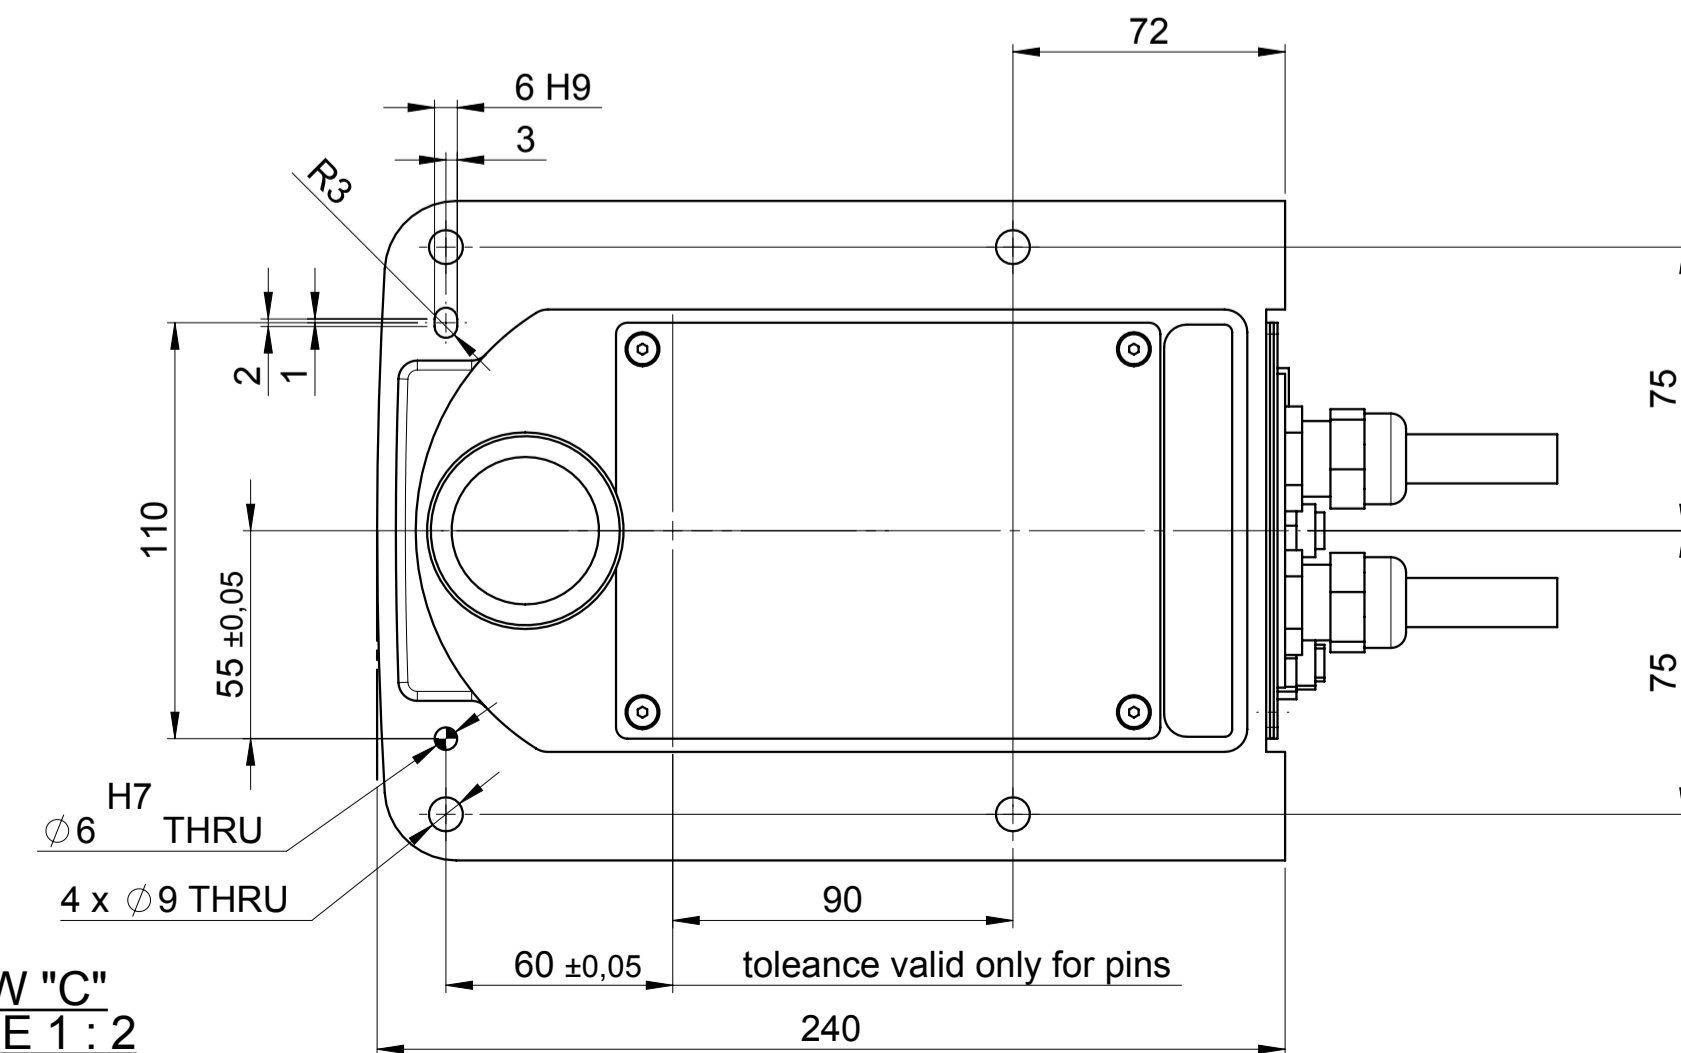

VIEW "C"  
SCALE 1:2



INDEX	DESCRIPTION	REVISION N.	AUTHOR	CHECKER	DATE
REVISIONS					
General surface texture	-		Author	Pernechele/Hadine	Creation date
√ Ra	Material		Checker	Cingano	26/09/2016
Surface quality as per UNI ISO 1302 specification, where not differently specified	Heat treatment		Scale	1:5	Released date
Undimensioned edges	-		Surface treatment		Sheet N.
- ± 45°	Hardness		Developed with CAD system software	DO NOT MAKE MANUAL CHANGES	1/1
All details must be free of burrs and sharp edges which may be detrimental to satisfactory assembly, safe handling, or function	Overall coarse dimensions		Weight (Kg)	16.10	Dimensions without specified tolerances must follow standard ISO 2768-mk
	Weight (Kg)		Casting model number		Safety has been given consideration in this design
	16.10				
This drawing is the property of COMAU S.p.A. and must not be used or copied without their permission	Spare part code	Manufacturing specifications			
	N				
DESCRIPTION					
WORKING AREA					
Rebel-S6-0.60c					
DRAWING NUMBER					
CR82415700-LWA-00					
Customer drawing number					
Supplier drawing number					