


EN

N-220 robot

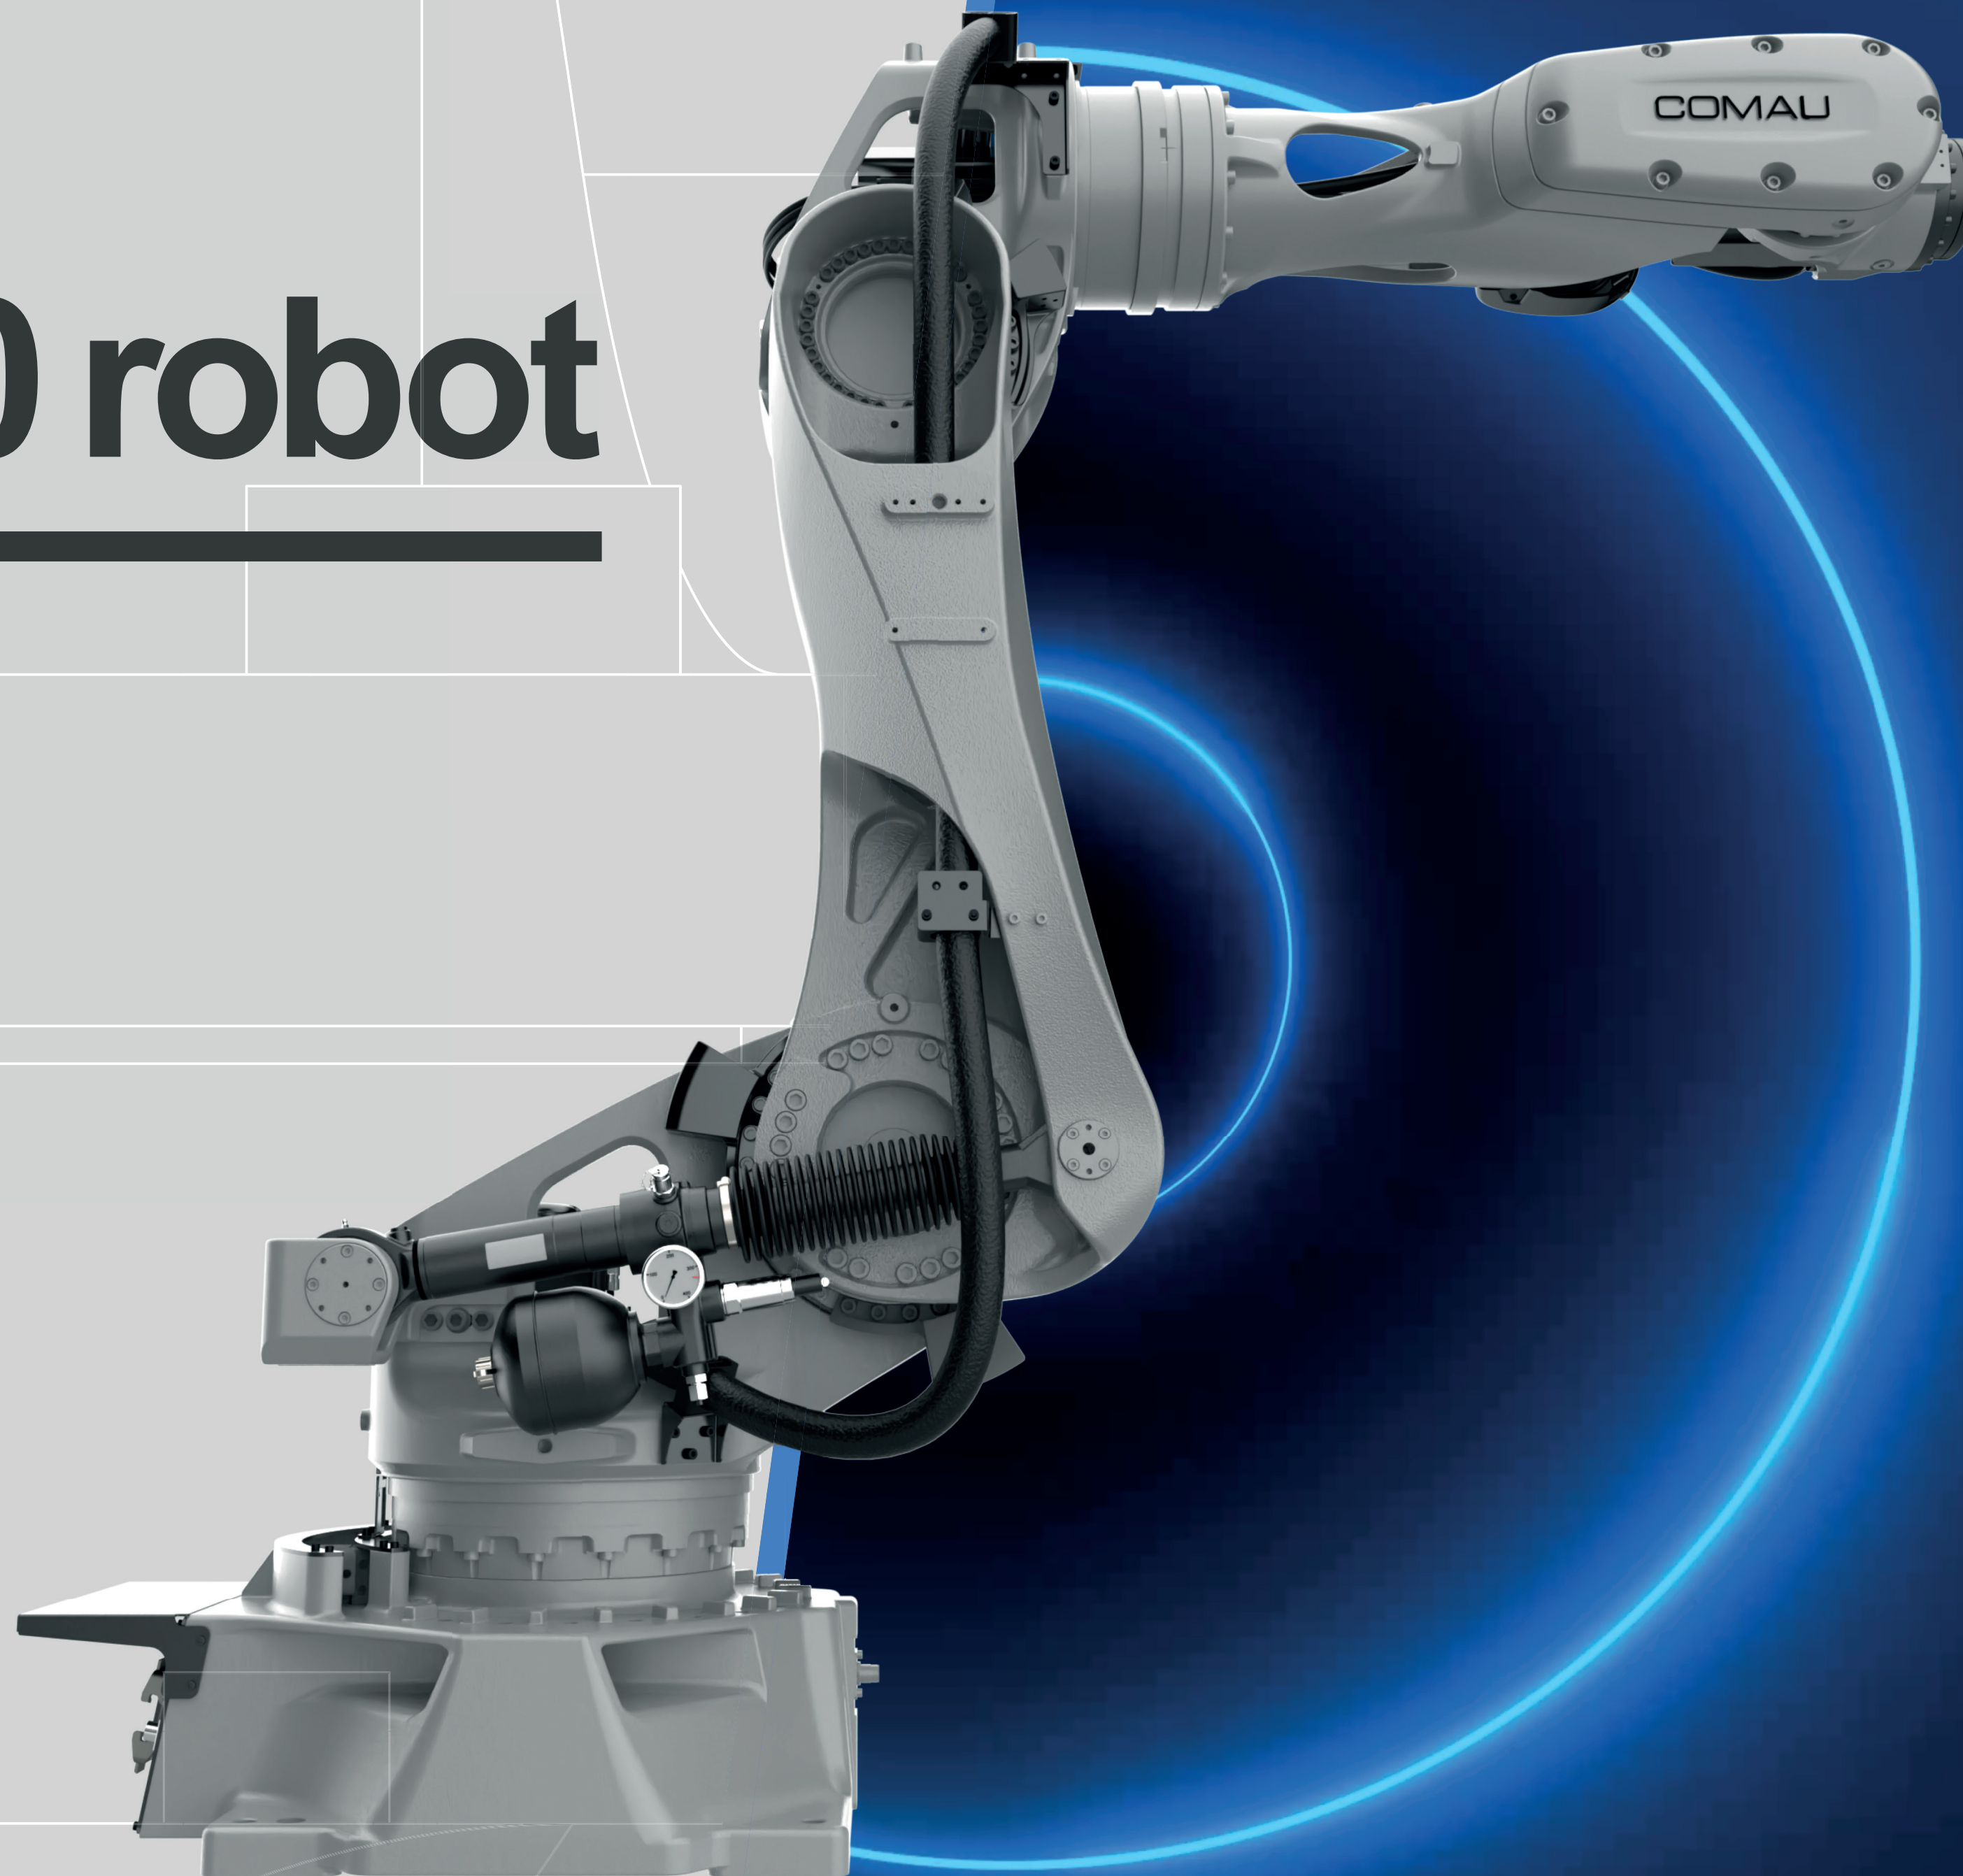


The new generation robot

N-220 robot is the result of an innovative architectural approach, through an intensive **use of modularity** and components reduction, compact motors, new APC and control drivers.

The most evolved motion algorithms are now suitable with **Comau e-Motion 3.0** to provide excellent performances both in terms of cycle time, repeatability and path control accuracy.

In spot welding and assembly applications N-220 robot offers the advantages of a ready-to-use, reliable and flexible machine while in packaging, palletizing and machine tending it provides highest speed and wide reach.

N-220 robot is supplied in a **basic dressing with multibus cable and air hose up to ax 3**, to which it is optionally possible to combine an **easy dressing solution** with a corrugated hose within the hollow forearm, up to axis 5 of the robot.

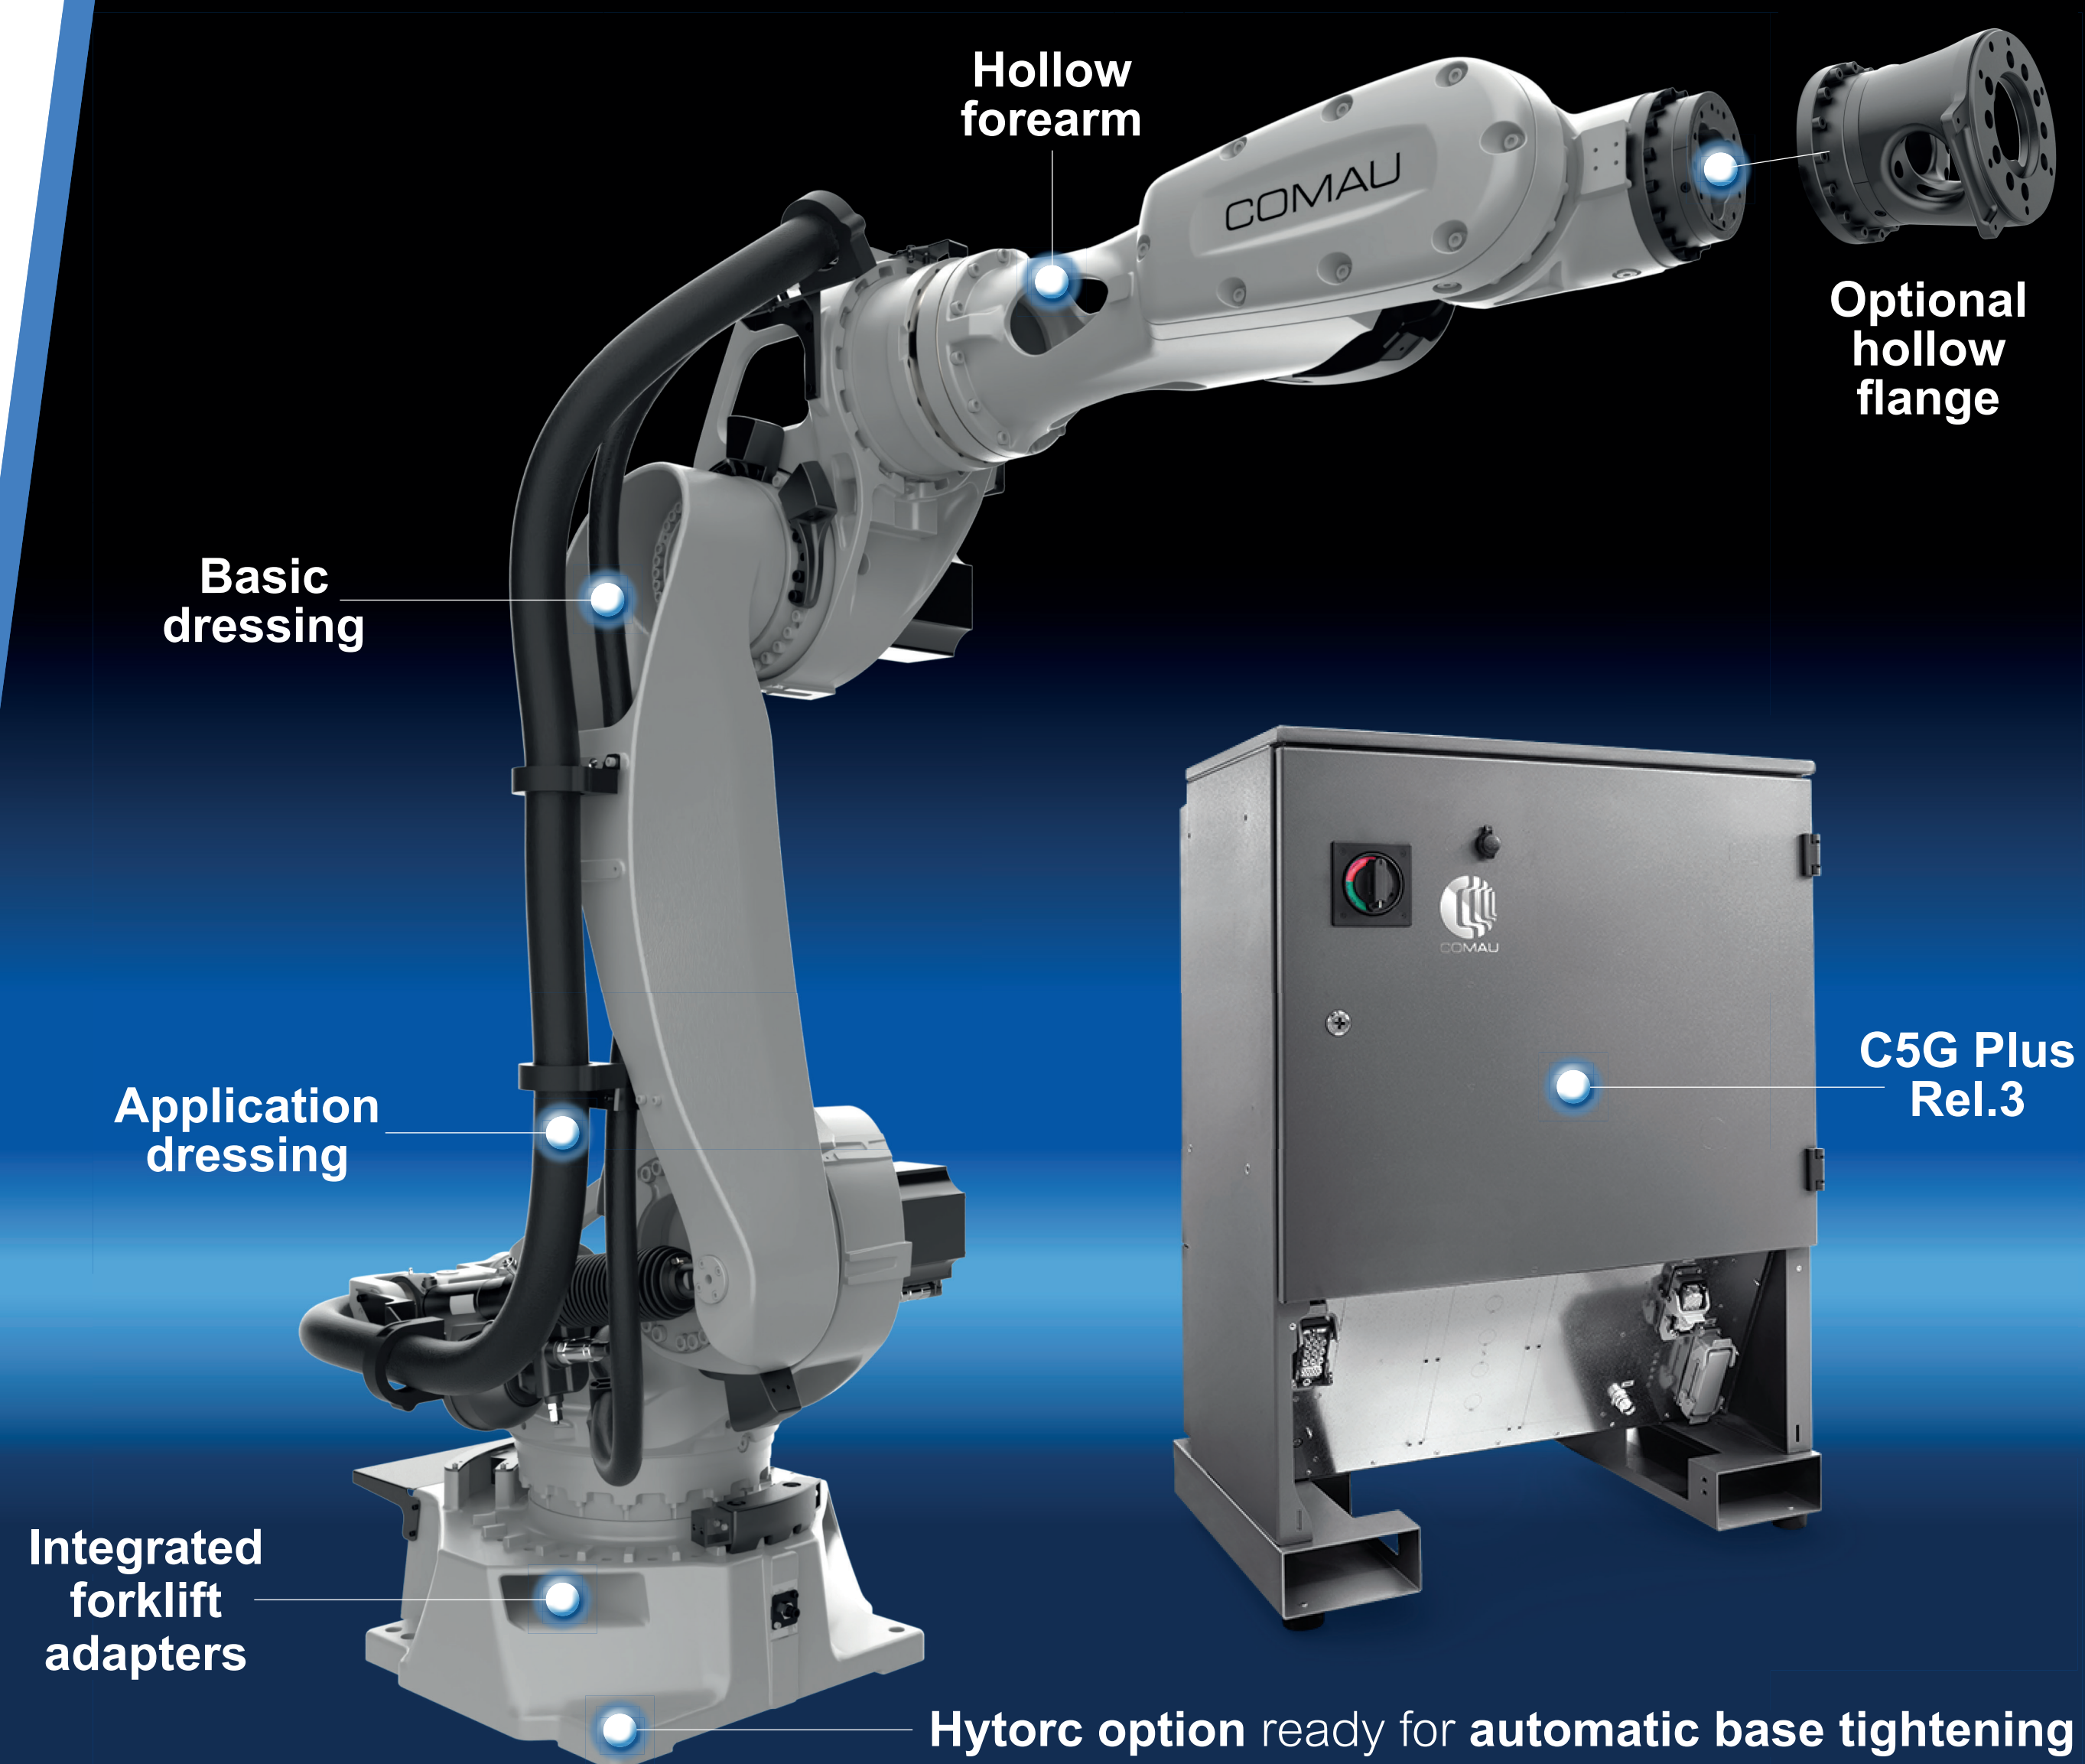

Features & Benefits

Comau N-220 robot

- Direct assembly between motor and gearbox
- Visual recalibration for “turn-set” recovery
- Enhanced SW motion algorithm with e-Motion 3.0
- Wide working areas

Simplified
maintenance

Reduced
power
consumption


Extreme
accuracy

High
Performance



Safety
functions

Easy
integration

- Improved MTBF and lower MTTR
- Multiarm programs
- IoT ready, MES compliant, Field availability, OPC UA
- Safe Motion and Safety Bus Options available

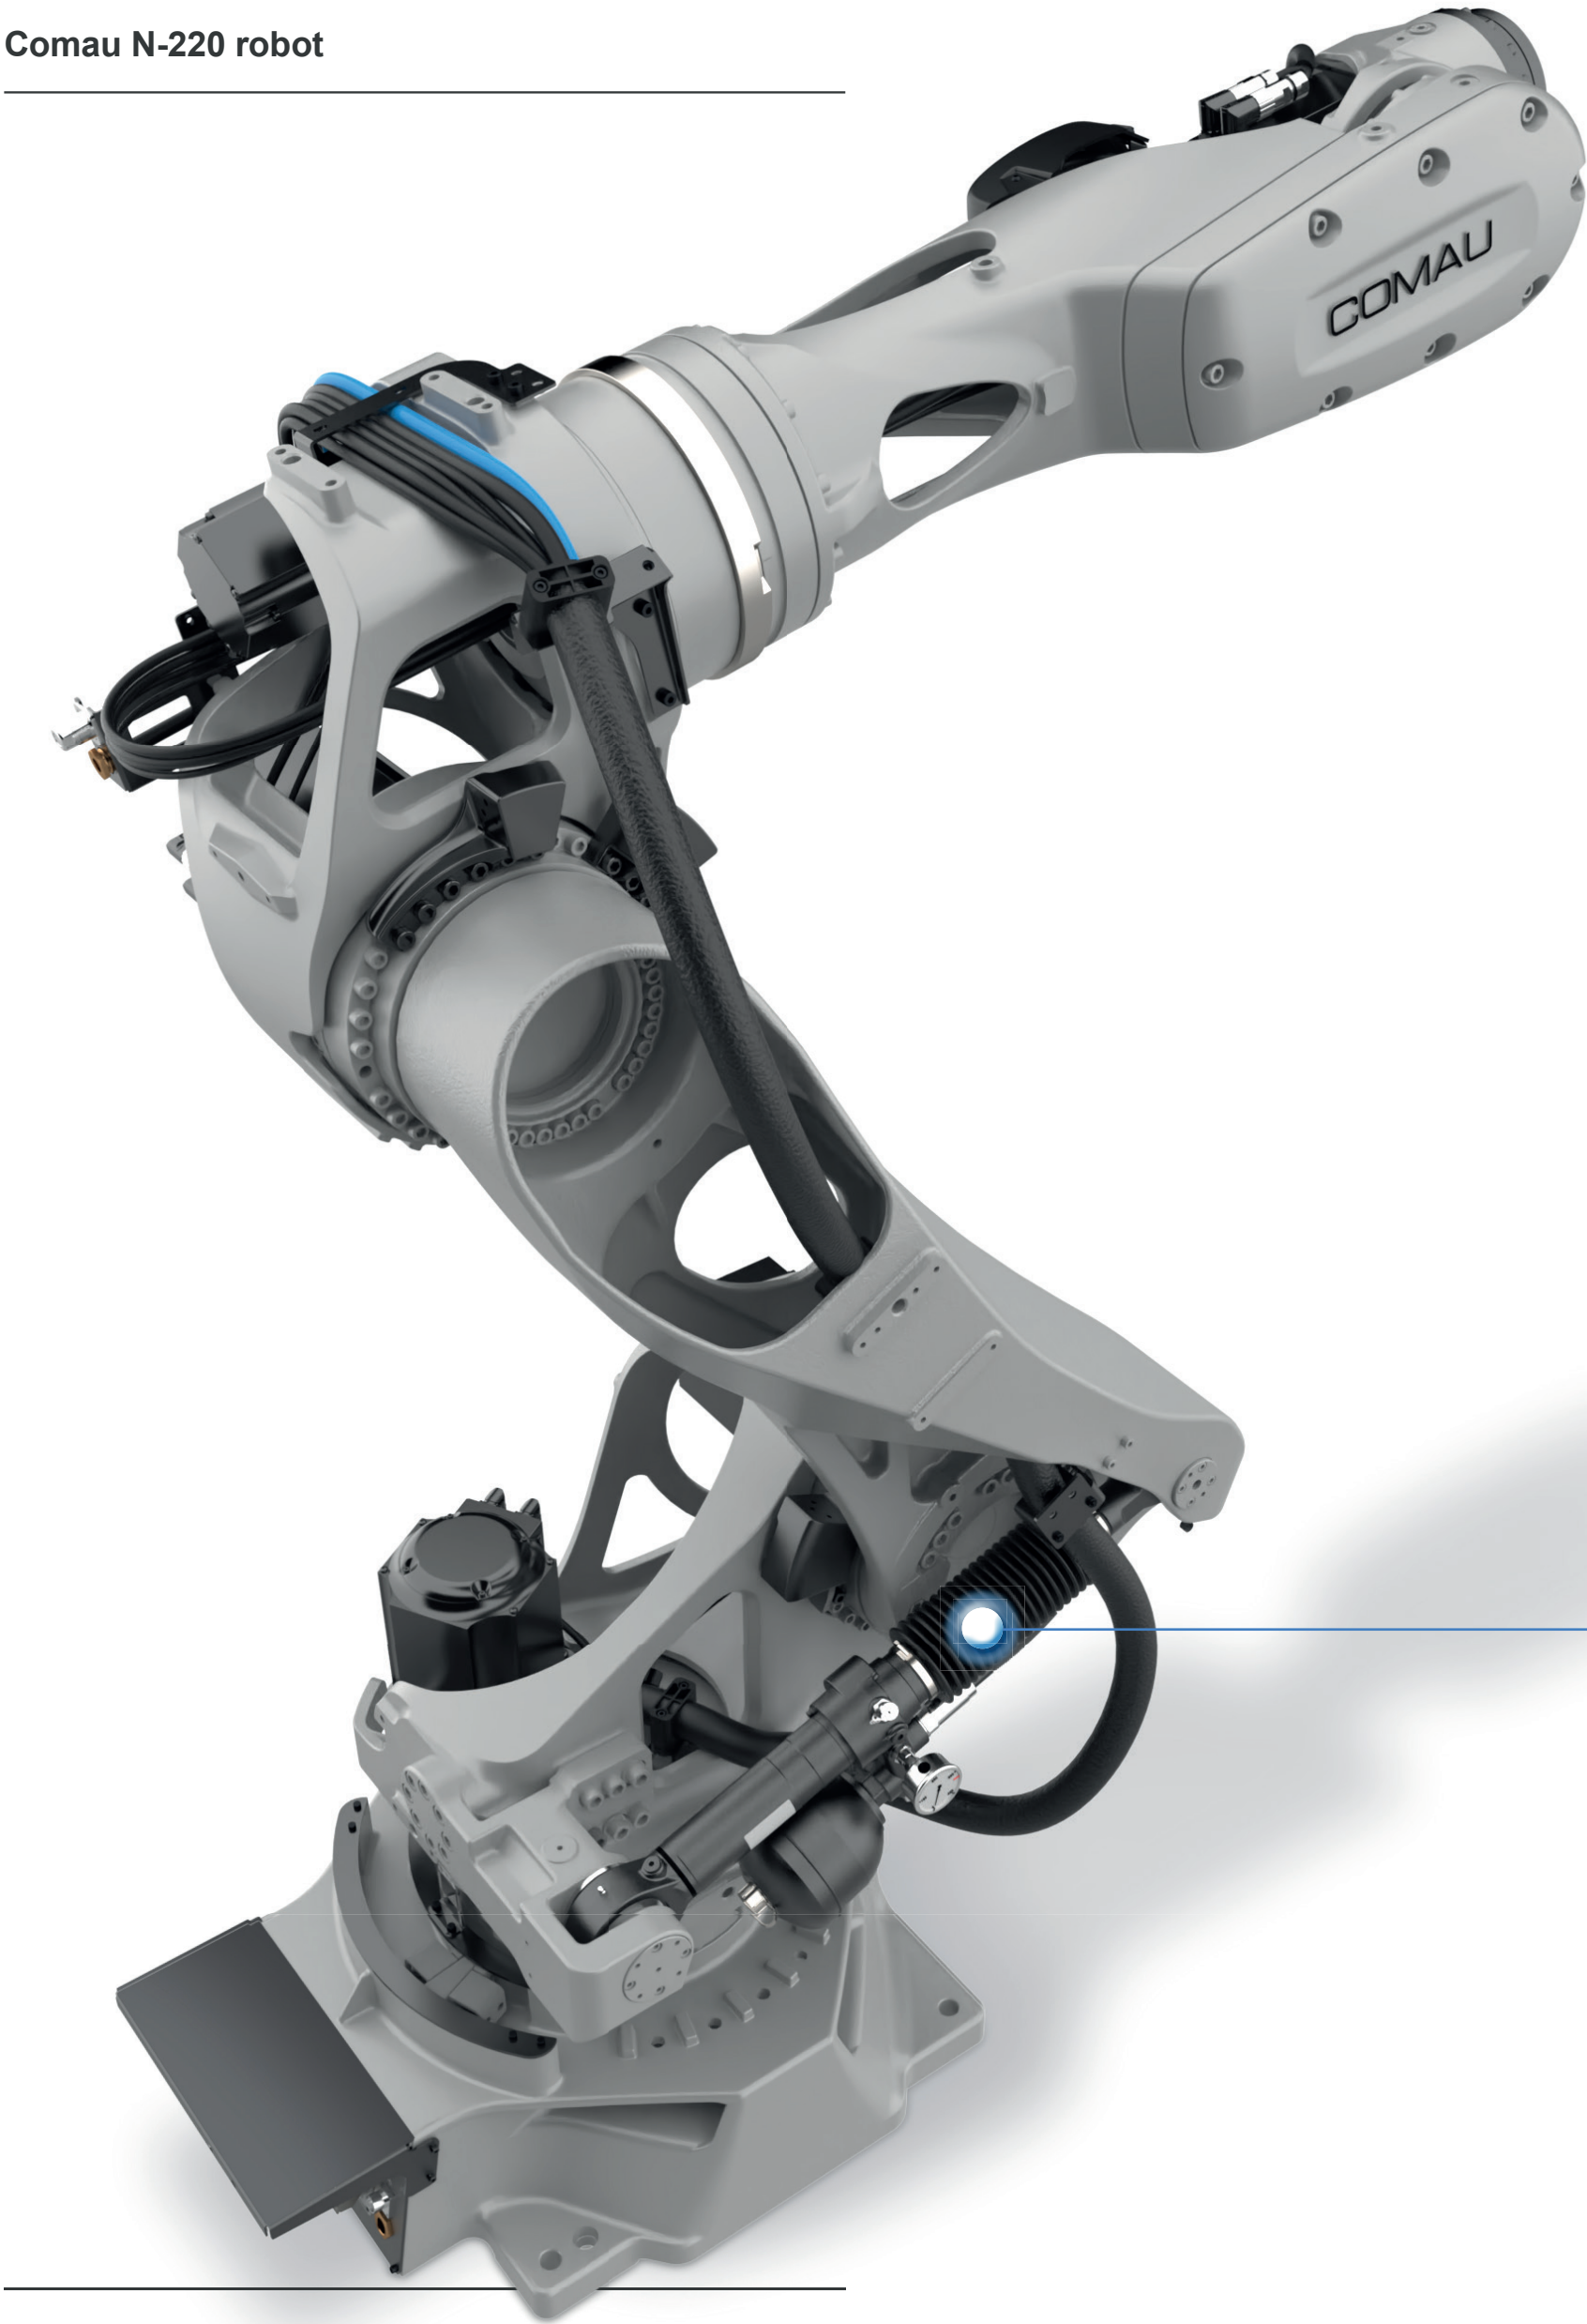

Working areas

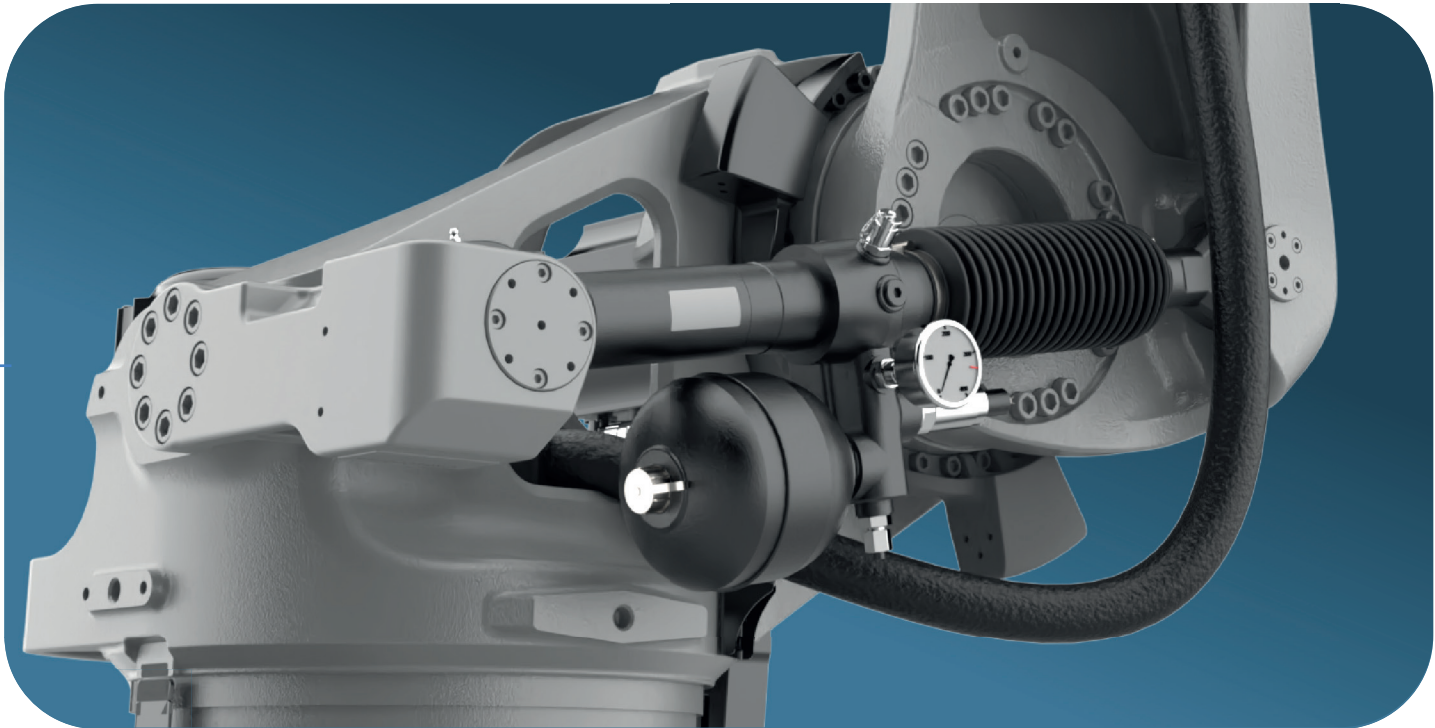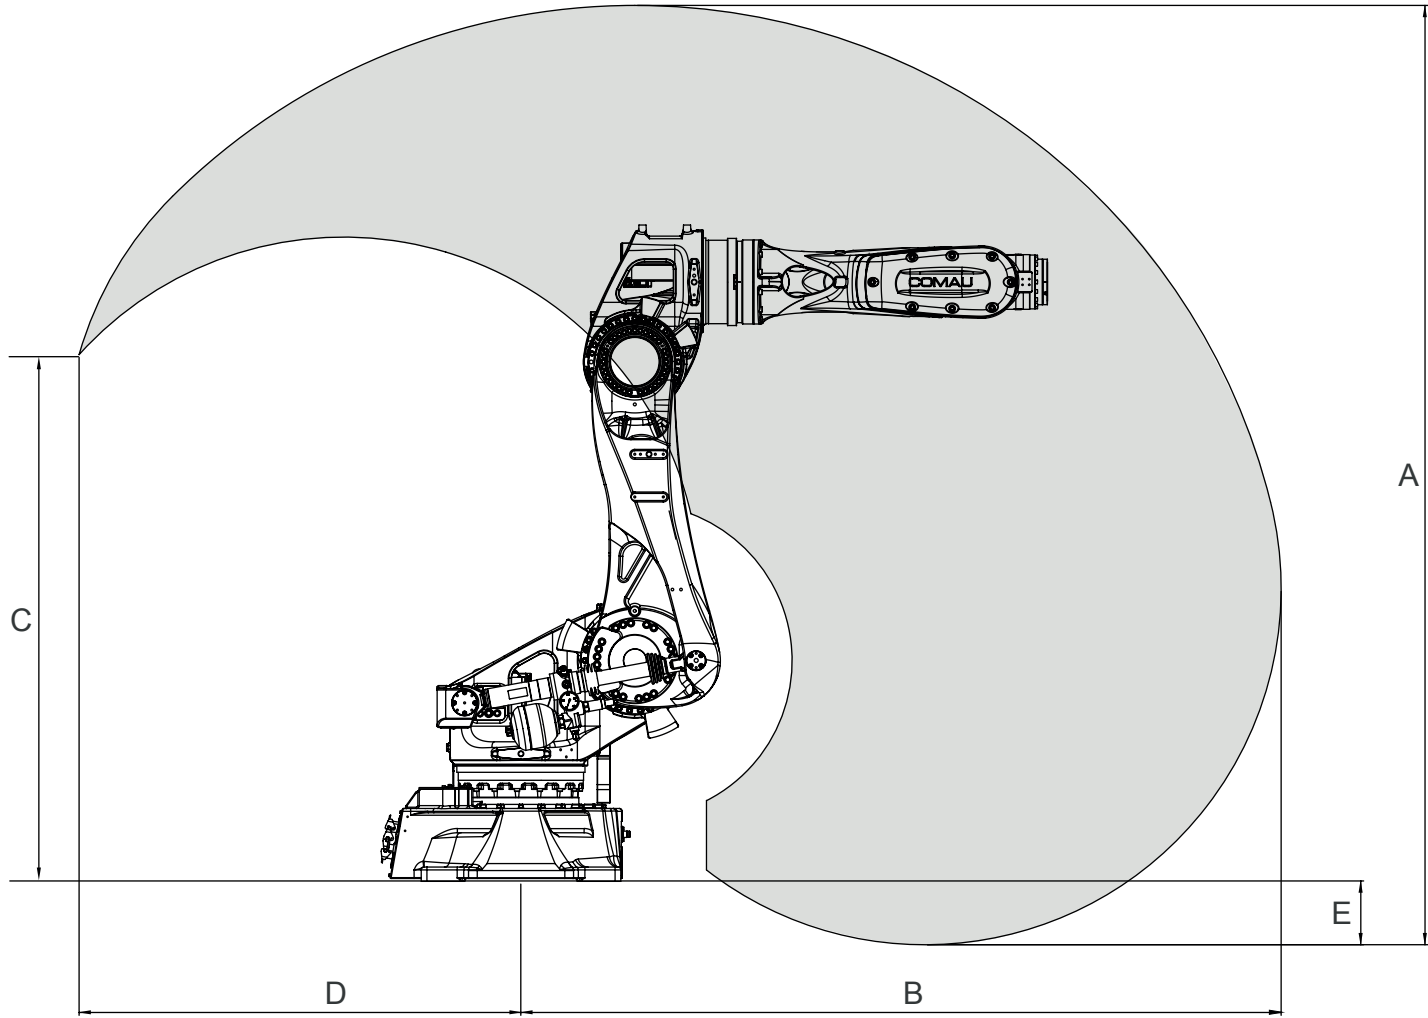

The use of a balancing system with nitrogen for axis2 (and larger axis3 stroke-ends) allows N-220 robot a wide backwards working area: that is ideal for **bending** and **agile handling** applications.

Technical data sheet

Model	N-220-2.7
Number of axes	6
Maximum wrist payload	220 kg
Additional load on forearm	50 kg
Maximum horizontal reach	2670 mm
Torque on axis 4	1270 Nm
Torque on axis 5	1270 Nm
Torque on axis 6	780 Nm

Stroke (max speed)	Axis 1	+/- 180° (120°/S)
	Axis 2	-77° / +76° (100°/S)
	Axis 3	-167° / +74° (110°/S)
	Axis 4	+/- 200° (140°/S)
	Axis 5	+/- 125° (140°/S)
	Axis 6	+/- 2700° (210°/S)

Repeatability	0.05 mm
Tool coupling flange ISO	9409 - 1 - A 125
Robot weight	1193 kg
Protection class	IP65
Mounting position	Floor

Operating area type		Type 1
Operating areas	A	3076,4
	B	2670,5
	C	1850,0
	D	1552,2
	E	222,7
	F	-

Model	C5G Plus Rel.3
Dimensions:	800x1110x510 mm
Weight:	125 kg
Working temperature:	5 to 45°C (5 to 55°C with cooler)
Humidity:	from 5% to 95% without condensation
Extended line power range:	400 to 500V
Available for:	N-220
SAFE Control:	available version
Servo-gun ready	available version



robotics.comau.com

Follow us



The contents of this brochure are supplied for general information only. Comau S.p.A. reserves the right to alter specifications at any time without notice for technical or commercial reasons. The illustration does not necessarily show the products in their standard version. **Edition - 4/22 - Turin**

Made in Comau